# Sliding Door Installation Manual

## Model London and London Plus

Stainless steel hardware that ensures superior quality and durability in brushed nickel/satin or polish chrome finish.

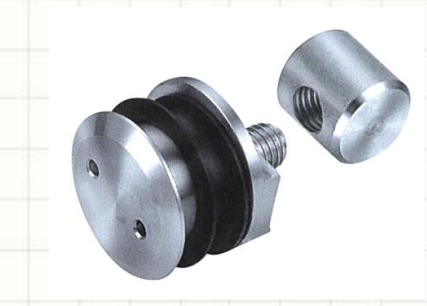

**2-Door rollers** **2-Clamps for tracks**

**For our in stock panels, the clamps are installed regarding to the panel size-for easy installation**

**2-Rail-wall connectors,** **Sliding rail, 2-Clamp installed**

**2-Door stops.** **1-Floor guide,** **1-Door handle**

**Step 1-**

For 60” Rail: Take the measurement of your door opening. Cut the Rail 1½” shorter than the opening, being careful to cut the correct end. The 60” pipe has pre-drilled holes at one end. If cutting is required, it should be done from the opposite end.

**Step 1A –**

For longer than 60” support pipe: Drill 2 holes (diameter 3/8”)in the pipe for the installation of the hardware for the fixed glass panel. The first hole is located 5” from the pipe end, and the second hole 15⅛”, 18” ,21¼” or regards the holes in a custom panel from the center of the first hole. Check always the hole distance in your fixed glass panel.

## 2-Clamp for tracks

**Step 2-** Connect the 2 pcs. to the rail, slide one door stopper in first. See photo on the next page.

Before installing the rail to the wall, slide the other door stopper onto the rail.

## 2-Rail-wall connector

To install the wall connectors: Drill holes regarding to the screws, you use maybe different screws as delivered. To locate the correct mounting locations, measure from the bottom of the glass panel to the center of the rail adding 1/16” for space under the glass panel when installed. (do not set the glass on the tile floor.)

# Install the rail and the fix glass panel

Slide a Rail-wall connector onto each end of the pipe.

Connect the pipe to the wall and slide the pipe holder in place, tighten the lock screws with the allen (hex-head) key.

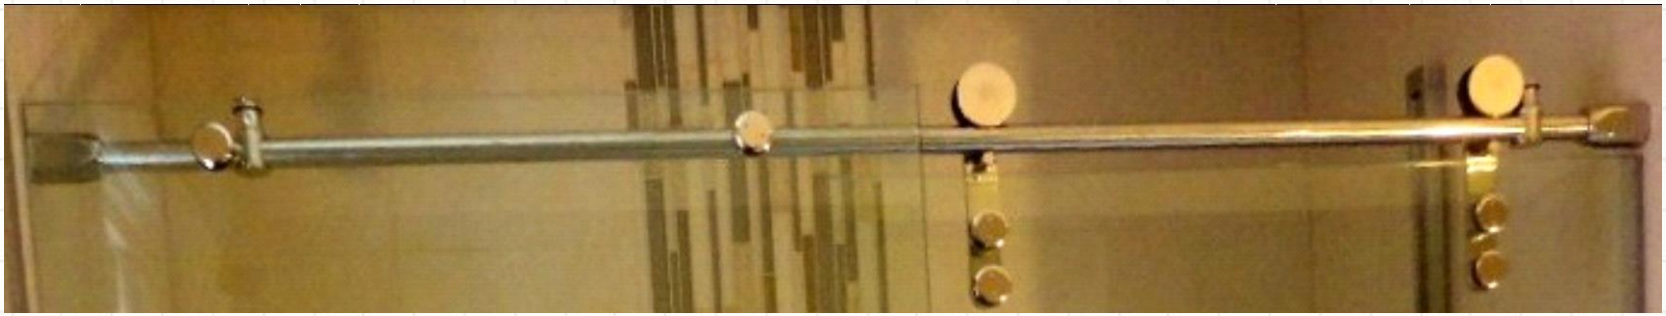

Install the fixed glass panel to the rail with 1/16” space on the bottom and fill with clear silicon.

Install the floor guide for the sliding panel.

The floor guide has an adjustable insert for 8 mm. 10 mm and 12 mm glass, please set on 10 mm.

Install the door rollers on the sliding panel and hang the door behind the fixed panel on the pipe, adjust the door stopper and screw the safety pin in the roller.

# Sliding door installed

**Side panel for L shape shower.**
We also supply in stock or custom side panels for L shape corner showers.

Sliding doors for bathtub enclosure also available

SHOWERHOUSE

**1 Marconi Court Unit 5, Bolton, ON, L7E 1E2**
**Phone: 905 951 8110**

e-mail: info@showerhouse.ca
web: www.showerhouse.ca
Showerhouse is a division of IRRIC Holdings LTD
Phone: 905 951 8110 | 1 Marconi Court Unit 5 |
Bolton, ON, L7E 1E2